



Notified body N° 0075

EC-TYPE EXAMINATION CERTIFICATE

The following model of Personal Protective Equipment has been subjected to an EC-type examination in accordance with the article 10 of the PPE Directive (89/686/EEC) and has been shown to satisfy the relevant provisions of the Directive.

Certificate N°

0075/896/162/05/13/0425

Is given to the following model of personal protective equipment :

Issued to : NANTONG FOREIGN TRADE NATIVE PRODUCE & ANIMAL BY PRODUCTS CO.,LTD
41E QINGNIAN ROAD, NANTONG, JIANGSU

Distributor : CHINA
/

Product reference : N692

Description :

PPE Type : *Protective gloves against mechanical risks.*

Reference standard : *EN 388 : 2003.*

Category : *II*

Full description of the PPE, reference rules verified in the context of the EC-type examination and information given on the product are detailed in the complete certificate.

Issued in Lyon by Lionel Gaudillere
Head of CE marking

Date of issue : May 16th, 2013



In application of the Directive ref 89/686/EEC of the 21th December 1989, concerning the alignment of member state legislation relating to personal protective equipment and the decree N°92-765, 766 and 768 of the 29th July 1992 concerning the transposition of this Directive into French law. CTC is notified by decree of the Ministry of work of the 20th December 2010 and is registered under the number 0075 in OJEU.



4 rue Hermann Frenkel 69367 Lyon cedex 07 FRANCE
Tel : 33 472.761.010 - Fax : 33 472.761.000 - email : ctclyon@ctcgroup.com – www.ctc.fr
Comité professionnel de développement économique cuir chaussure maroquinerie
Siret 77564972600160 – code NAF 9412Z – TVA FR B8775649726





In application of the Directive ref. 89/686/EEC of the 21st of December 1989, concerning the alignment of member state legislation relating to personal protective equipment and the decrees n° 92-765, 766 and 768 of 29th of July 1992 concerning the transposition of this Directive into French law,

CTC

4,rue Hermann Frenkel - 69367 Cedex 07 - France

Tel +33 (0)4 72 76 10 10 - Fax +33 (0)4 72 72 76 10 00 - E-Mail : ctclyon@ctcgroupe.com - www.ctc.fr

Comité Professionnel de Développement Cuir Chaussure Maroquinerie - Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

authorized by decrees of the Ministry of Work, Employment and Health of the 20th of December 2010,

registered under the number 0075, published in OJEC, delivers :

CE TYPE EXAMINATION CERTIFICATE 0075/896/162/05/13/0425

To the following model of personal protective equipment :

* protective glove against mechanical risks.

* reference of the model : N692

* responsible for placing on the market :

**NANTONG FOREIGN TRADE NATIVE PRODUCE & ANIMAL BY
PRODUCTS CO.,LTD**

41E QINGNIAN ROAD, NANTONG, JIANGSU

CHINA

Description of the protective glove, reference of technical rules verified in the context of the CE type examination and informations indicated on the product are detailed in the following pages of this certificate.

Drawn up in Lyon, on May 16th, 2013

Issued by Lionel GAUDILLERE



NOTA : Any modification to new items of the personal protective equipment object of this CE type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the CE type approval certificate (change of adress, change of company status) should be brought to the attention of the notified body in accordance with law n° R. 4313-38 of the French Code of Work.

1. DESCRIPTION OF THE PROTECTIVE GLOVE

According to the technical file index : 01

Reference : N692

Basic Model

Dated : MAY, 2013

nitrile dipping glove

Available sizes :

7 8 9 10 11

Visual description :



Material :

	Colour	Material	Gauges	Thikness
PALM	blue	nitrile		
	beige	cotton	32	
BACK	blue	nitrile		
	beige	cotton	32	
LINING				
CUFF	beige	cotton	10 gauges	
BINDING				

2. PROTECTION SCOPE

Compliance with the essential requirements of the Directive 89/686/EEC has been verified by using following technical rules:

- * EN 420:2003+A1:2009 - General requirements for gloves and test methods
- * EN 388:2003 - Protective glove against mechanical risks
- * At the date of certificate, the product is in compliance with Annex XVII of European REACH regulation (552/2009/EC and associated revisions)

References of test reports performed in order to verify the compliance with the requirements of the technical rules :

Laboratory	CTC Asia	CTC France	Other
EN 420	SH60385-13, SH60584-13		SH60385-13
Azo	SH60385-13		
EN 388	SH60385-13		

Performance levels offered against mechanical risks (EN 388:2003) are:

Abrasion resistance	Blade cut resistance	Tear strength resistance	Puncture resistance
3	1	1	1


The levels of performance have been measured on the palm

3. MARKING

Each glove is clearly marked with the following information:

- * Logo of the authorized representative:
- * **CE** marking
- * reference of the model: N692
- * size
- * pictogram for mechanical risks followed by the performance levels
- * information pictogram

Marking example:

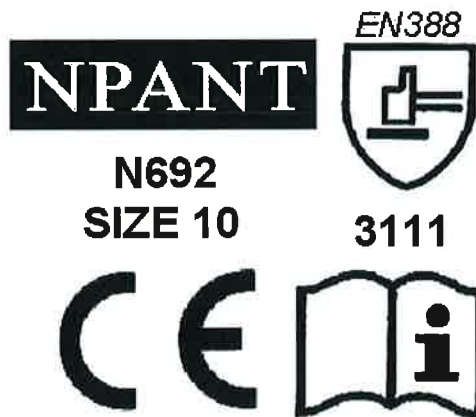

**NANTONG FOREIGN TRADE NATIVE PRODUCE & ANIMAL BY
PRODUCTS CO.,LTD**

MANUFACTURER'S TECHNICAL FILE

Reference of the product	:	N692
Technical file index	:	01
Last update	:	MAY, 2013

IDENTIFICATION

Reference of the product : : N692
Technical file index : : 01
Last update : : MAY, 2013

CE Type Examination Applicant :

NANTONG FOREIGN TRADE NATIVE PRODUCE & ANIMAL BY
PRODUCTS CO.,LTD

41E QINGNIAN ROAD, NANTONG, JIANGSU

CHINA

tel : 0086-513-83560252

fax : 0086-513-83568494

Manufacturer :

NANTONG PREMIER SAFETY CO.,LTD

38 GUOQIANG ROAD,NANTONG, JIANGSU

CHINA

tel: 0086-513-85665977

fax: 0086-513-85663977

GLOVE DESCRIPTION

Glove description :

nitrite dipping glove

Visual description:



Available sizes :

Minimum length of glove (mm)	Sizes
230	7
240	8
250	9
260	10
270	11

Glove constitution :

	Reference	Colour	Material	Surfacic mass	Gauges	Thickness
PALM		blue	nitrile	300g/m ²		
		beige	cotton	200g/m ²	32	
BACK		blue	nitrile	300g/m ²		
		beige	cotton	200g/m ²	32	
LINING						
CUFF		beige	cotton	300g/m ²	10 gauges	
BINDING						

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protection Equipment Directive (89/686/CE).

This glove is designed for mechanical risks.

It is a category II product.

GENERAL REQUIREMENTS

Standard EN 420 : 2003 + A1 : 2009

Dexterity : 5
PH of glove and lining is greater than 3.5 and lower than 9.5 : yes
Chromium VI lower than the detection limit : conform
Size : conform

At the date of certificate, the product is in compliance with Annex XVII of European REACH regulation (552/2009/EC and associated revisions)

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

Mechanical hazard EN 388 : 2003

Protection offered	Performance levels
Abrasion resistance	3
Blade cut resistance	1
Tear strength resistance	1
Puncture resistance	1

TEST REPORTS

Laboratory	CTC Asia	CTC France	Other
EN 420	SH60385-13, SH60584-13		SH60385-13
Azo	SH60385-13		
EN 388	SH60385-13		

MARKING - PACKAGING

Information printed on the glove :

Logo of the authorized representative :

Logo 


Glove's reference : N692

Size indicator

Pictograms related to risks against which protection is offered with performance levels

Information pictogram

Marking example :

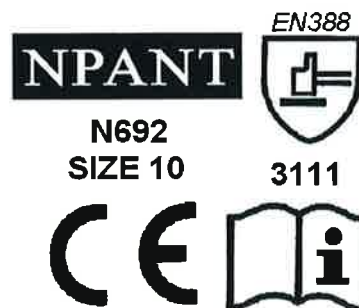

Method of marking on the glove :

Put on glove by printing a lable inside glove or print on the back

Packaging :

Every one pairs put in one polybag, 12pairs in one big polybag, Every 10 bags put in one carton

MEANS OF CONTROL

1. All raw materials we purchased from fixed factory, the supplier for leather, fabric and thread all have registered ISO9001, all materials must be accordant with EN420, such as the pH, Azo tests, etc.
2. We have 3 lines which are dipping, inspecting and packaging in the whole procedure, there are 2 supervisors for each line and daily report will be issued. Every worker has his/her own working number and be responsible for his/her product.
3. The management of dipping:
 - 3.1 The variety of raw material should be clearly separated.
 - 3.2 The mould for dipping should be stable and cleaned
 - 3.3 All dipping should be dipped by skilled worker
 - 3.4 After dipping, we have 2 people inspect the quality, avoid bad dipping, bad material etc.
4. The management of inspecting
 - 4.1 We check the printings on the glove very carefully which should be corresponding to the order sheet.
 - 4.2 We check the appearance very carefully.
 - 4.3 We will check the size of all the gloves, those bad size ones will be abandoned.
5. The management of packaging:
 - 5.1 We won't package those products which are not corresponding to the order sheet.
 - 5.2 We carefully count the number of gloves before packaging.
 - 5.3 We carefully put the gloves in the polybag, these poly bags all in good quality.
 - 5.4 We print the shipping mark on the carton according to the order.

INSTRUCTION FOR USE

NANTONG FOREIGN TRADE NATIVE PRODUCE & ANIMAL BY PRODUCTS CO.,LTD

41E QINGNIAN ROAD, NANTONG, JIANGSU

CHINA

Glove reference : N692

Available sizes : 7 8 9 10 11

Glove description :

nitrile dipping glove

THIS GLOVE IS A PERSONAL PROTECTIVE EQUIPMENT BELONGING TO THE CATEGORY II.

It meets the requirements of the Directive 89/686/CEE : innocuousness, comfort, solidity.

It has been subject to a CE type Examination performed by :

C.T.C. (0075)
4, rue Hermann Frenkel
69367 LYON Cedex 07
FRANCE

Applicable standards :

The glove meets the requirements of the standard EN 420 « General requirements for work glove ». Dexterity : 5

Moreover, this glove has been designed for the following applications :



Application :

Mechanical hazard - EN 388



3111

Levels of performance

Abrasion resistance	3	(on 4 maxi)
Blade cut resistance	1	(on 5 maxi)
Tear resistance	1	(on 4 maxi)
Puncture resistance	1	(on 4 maxi)

Protection limit :

The protection against risks or hazards which are not mentioned in this document is not warranted. The levels of performance mentioned are only valid for the palm of the glove. The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated. These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

This glove shall not be in contact with fire.

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.